

## COLOURS

To overcome any minor shade variations inherent in the production of natural clay products, we recommend that tiles are mixed from at least 3 pallets on site.



RUSTIC RED



BURNT RED



GLOSS BLACK



NUANCE



NATURAL RED



WEATHERED



VIEUX NORD

The colours shown here are only as accurate as allowed for by the printing process. Product samples are available on request.



This product was manufactured by an organisation certified compliant, by AFNOR Certification, with the following benchmarks: ISO 9001 for quality, ISO 14001 for the environment, and ISO 50001 for energy. All EDILIANS roof tiles comply with the requirements of the NF EN 1304 standard. Only tile models identified by the NF, NFM, or NFFP logo are compliant with the requirements of the NF063 Clay Roof Tiles certification. The characteristics certified by the NF Clay Roof Tiles specification are appearance, geometric characteristics, resistance to breakage by bending, Class 1 waterproofing, resistance to freezing in accordance with NF EN 539-2, resistance to "mountain climate" freezing (for models bearing the NFM logo only), and suitability for use on low-pitch roofing (for models bearing the NF FP logo only). [www.marque-nf.com](http://www.marque-nf.com)

**EDILIANS services:**  
At your side throughout the project

[edilians.co.uk](http://edilians.co.uk)

This document is not contractual and may be changed at any time (see the latest information on our website, [www.edilians.com](http://www.edilians.com)). The photographs present suggested layouts and are not contractual. Edilians S.A.S., registered capital €161,227,700, Lyon company register B 449 354 224, registered office 65, chemin du Moulin Carron, 69570 Dardilly, France. Created by @ 2024 Easycom for the design, creation, and layout / @2024 Edilians. All other rights reserved.

# MONOPOLE N°1 Huguenot

## CLAY ROOF TILE

Traditional Roman Interlocking Clay Roof Tiles

Ref. 306



SÉLECTION  
PATRIMOINE



- Traditional Roman Interlocking tiles
- Suitable for new build and renovation
- Low 25 ° roof pitch\*
- Comprehensive 30 years durability guarantee
- EDILIANS Integrated solar compatible
- Available in 7 attractive colours

\*Subject to technical approval



**EDILIANS**

Shaping a sustainable future together

Traditional Roman  
Interlocking Clay  
Roof Tiles

**Technical data**

- Quantity per pallet:**  
600 tiles
- Coverage at 241mm gauge:**  
22.0 tiles per m<sup>2</sup>
- Batten gauge:\***  
241mm
- Overall length:**  
297mm
- Overall width:**  
215mm
- Cover width:**  
189mm
- Headlap:**  
56mm
- Weight per tile:**  
2.0kg
- Weight per m<sup>2</sup>:**  
44.0kg
- Minimum roof pitch\*:**  
25.0°
- Batten coverage per m<sup>2</sup>:**  
4.15m
- Batten sizes:**  
38 x 25mm for rafter centres up to 450mm  
50 x 25mm for rafter centres up to 600mm
- Tile nail:**  
50 x 3.35mm  
aluminium clout head

\* Always check each batch of tiles delivered to site to determine the actual gauge, which may vary slightly due to drying and firing shrinkage during the manufacturing process

**CLAY ROOF TILE**

**Traditional Roman Interlocking Clay Roof Tiles**

The EDILIANS Huguenot MONOPOLE N°1 is a traditional single roman interlocking clay roof tile produced at Wardrecques in the north of France.

Economical and versatile, the small modular size of the MONOPOLE N°1 makes it ideal for a wide range of refurbishment and new build projects, offering cost savings over all concrete plain tiles.

**FEATURES**

A hugely popular tile, economical and versatile, available in seven eye-catching colours and a pre-mixed blend.


**ACCESSORIES AND FITTINGS**

An extensive range of accessories covering all roofing needs


**Verge**




**Cloaked verge**

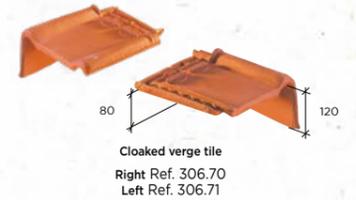

**Half round interlocking ridge**




**Ornamental ridge**



**Hip**



**Half round non-interlocking ridge**



**Clips**



\*Clipped Monopole tiles must also be nailed

PRODUCT  
ADVANTAGES

**FOR ARCHITECTS**

Special technical specifications in the Product Data Sheet available to download from our website, [www.edilians.co.uk](http://www.edilians.co.uk)