

COLOURS

To overcome any minor shade variations inherent in the production of natural clay products, we recommend that tiles are mixed from at least 3 pallets on site.



SLATE



RUSTIC RED



NATURAL RED



VIEUX NORD



OLD VINTAGE

The colours shown here are only as accurate as allowed for by the printing process. Product samples are available on request.



This product was manufactured by an organisation certified compliant, by AFNOR Certification, with the following benchmarks: ISO 9001 for quality, ISO 14001 for the environment, and ISO 50001 for energy. All EDILIANS roof tiles comply with the requirements of the NF EN 1304 standard. Only tile models identified by the NF, NFM, or NFFP logo are compliant with the requirements of the NF063 Clay Roof Tiles certification. The characteristics certified by the NF Clay Roof Tiles specification are appearance, geometric characteristics, resistance to breakage by bending, Class 1 waterproofing, resistance to freezing in accordance with NF EN 539-2, resistance to "mountain climate" freezing (for models bearing the NFM logo only), and suitability for use on low-pitch roofing (for models bearing the NF FP logo only). www.marque-nf.com

EDILIANS services:
At your side throughout the project

edilians.co.uk

PANNE S Huguenot

CLAY PANTILE
Traditional Classic Pantile
Ref. 323


SÉLECTION
PATRIMOINE

- Respect for architectural tradition
- Suitable for new builds and renovation
- Accessories shared with Double Panne S
- Wide range of colours



This document is not contractual and may be changed at any time (see the latest information on our website, www.edilians.com). The photographs present suggested layouts and are not contractual. Edilians S.A.S., registered capital €161,227,700, Lyon company register B 449 354 224, registered office 65, chemin du Moulin Carron, 69570 Dardilly, France. Created by @ 2024 Easycom for the design, creation, and layout / @2024 Edilians. All other rights reserved.



EDILIANS

Shaping a sustainable future together

Traditional Classic Pantile

Technical data

Quantity per pallet:
420 tiles

Coverage:
20.0 tiles per m²

Batten gauge*:
275mm

Overall length:
342mm

Overall width:
232mm

Cover width:
190mm

Headlap:
64mm

Weight per tile:
2.3kg

Weight per m² at maximum gauge:
46.0kg

Minimum roof pitch:
22.5°

Batten coverage per m²:
3.63m

Batten sizes:
38 x 25mm for rafter centres up to 450mm

50 x 25 mm for rafter centres up to 600mm

Tile nail:
50 x 3.35mm aluminium clout head

* Always check each batch of tiles delivered to site to determine the actual gauge, which may vary slightly due to drying and firing shrinkage during the manufacturing process

CLAY PANTILE

Traditional Classic Pantile

A beautiful traditional clay tile designed to adorn and complement roofscapes in regions where the Old English Pantile has been the first choice for centuries.

Made from Flemish clay, renowned for its high quality and mellow, attractive colours, the PANNE S results from the combination of our highly advanced clay technology and exceptional quality standards producing one of the most appealing and traditional of tiles.

FEATURES

The PANNE S features discretely hidden waterbars to maintain a traditional appearance whilst offering a high level of performance.

The tile's appealing size and modular design permits easy installation at roof pitches down to 22.5°.

Made from durable Flemish clays, the PANNE S is available in seven mellow, enduring colours.


ACCESSORIES AND FITTINGS

An extensive range of accessories covering all roofing needs


Verge



Ornamental ridge

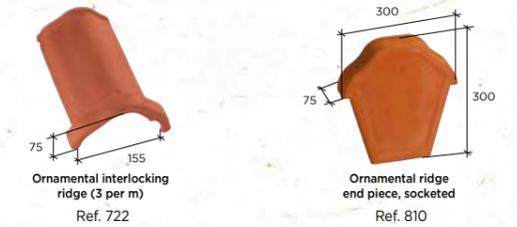

Half round interlocking ridge

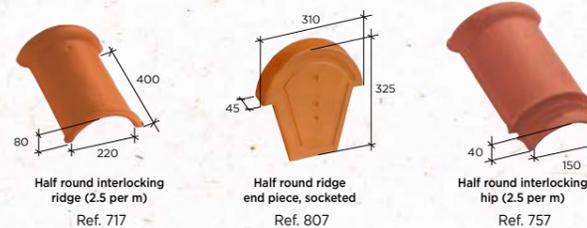

Hip



Half round interlocking ridge



Clips



* Clipped Panne S tiles must also be nailed

PRODUCT ADVANTAGES

FOR ARCHITECTS

Special technical specifications in the Product Data Sheet available to download from our website, www.edilians.co.uk